


MT80 说明书文档  
 尺寸: 单面 54\*87mm  
 材质: 157g 双铜  
 工艺: 4C, 风琴折, 覆哑膜  
 页数: 正反面共 10P

正面

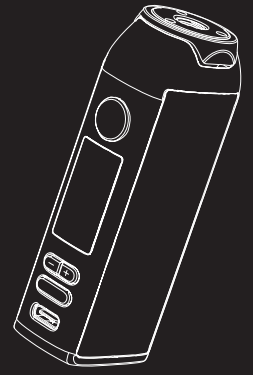

**BACK TO BASIC MOD**  
USER MANUAL

**⚠ SAFETY WARNING & INSTRUCTIONS**

Please read this user manual carefully before using the product and keep the product in a safe place:

- Warning for vulnerable consumer groups: The sale and use of e-cigarettes is prohibited for people under the age of 21. The use of e-cigarettes and liquids during pregnancy and breastfeeding, or by a non-smoker is not recommended. Keep this e-cigarette and its components out of the reach from children.
- Battery Caution: Do not expose the device to extreme temperatures. Do not disassemble the device to service or change the battery without Lost Vape's recommendation. This is a high end and powerful device capable of providing a high voltage to the atomizer. We recommend only using the single 18650 battery (Not Included) in a proper manner. Only dispose of Lithium Polymer batteries at suitable waste disposal facilities.
- Atomizer Caution: Don't over-tighten the atomizer onto the 510 connector; the atomizer should be snugged, not tightened. Over-tightening may cause damage to the threading and the Delrin insulator.
- Verify The Authenticity: Please verify that the product is an authentic Lost Vape product before purchasing it. Fake and shoddy products may damage your personal health. To verify the product, please refer to <https://lostvape.com/anti-counterfeit/> and follow the steps described in the New Verification System. If you have any questions, please contact us by email, phone or our website to get help.
- Contacts: For further questions or inquiries, please contact Lost Vape by email at [support@lostvape.com](mailto:support@lostvape.com) or visit our website: [www.lostvape.com](http://www.lostvape.com).
- Warranty: The device is covered by a 3-month warranty from the date of purchase. Please check our Warranty Guidelines for further information. Coils and/or accidental damages are not covered by this warranty.

**1 MAIN FEATURE**

- 100W MAX OUTPUT POWER
- TEMPERATURE ADJUSTMENT
- TYPE-C CHARGING
- 18650 SINGLE BATTERY (Not Included)


**2 STANDARD PACKAGE**

1× Back to Basic 100W Mod      1× Type-C USB Cable  
 1× Warranty Card                1× User Manual

**3 BASIC PARAMETERS**

Dimension	91mm×36mm×25mm
Weight	136.6g
Battery	Single 18650 Lithium Battery (Not Included)
Battery Voltage	3.2V-4.2V
Output Voltage	0.8V-7V
Power Range	5-100W
Current Range	0.3A-30A
Temperature Range	200°F-600°F/100°C-300°C
Coil Resistance Supported Range	0.1Ω-3.0Ω
Screen Pixel	0.96" 142*271px
Body Material	Zinc Alloy


**4 COMPONENTS OVERVIEW**

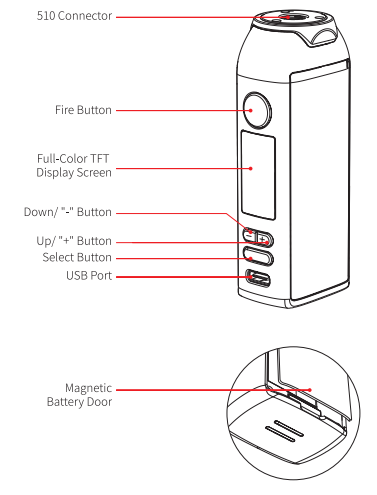


**5 BASIC OPERATION**

**● TURN ON/TURN OFF**  
 Press the fire button 5 times consistently to TURN ON/ TURN OFF the device. Screen will be dark in 10s without any operations, and it will turn off in another 10s.

**● Switch between modes**  
 1. Turn on the device; the POWER Mode is in red by pressing the Select button once.  
 2. It is ready to switch modes (POWER/VOLTAGE/TC-SS/TC-NI/TC-TI) by pressing Up (+) or Down (-) button.  
 3. Press the Select button again to confirm.



反面




**LOST VAPE®**

@lost\_vape  
 lost\_vape  
 www.lostvape.com

**● SET UP**


- Using the up(+) and down(-) buttons to adjust the wattage or voltage under POWER or VOLTAGE mode respectively to the desired value.
- Press the Select button to confirm.



**● TEMPERATURE CONTROL**


The temperature can be adjust under SS/TI/NI Mode during operation to prevent the coil being too hot regardless of fluid, wicking or airflow, a variety of undesirable situations can be prevented.

- Enter SS/TI/NI Mode: Using the up (+) and down (-) buttons change the temperature value between 100°C-300°C/200°F-600°F.
- Press the Select button to confirm.




**● WATTAGE LOCK/UNLOCK**

Press and hold Select and Up (+) Button at the same time to Lock and unlock the wattage setting.




**● PUFF TIME and PUFF COUNT RESET**

Press and hold Select and Down (-) Button at the same time to reset the puff time and puff count.




**● SCREEN COLOR CHANGE**

Press and hold Select Button for 2 seconds to change the color theme.



**● CHARGING**

The device has a built-in DC 5V TYPE-C port. Connect the USB-C cable to a power source, the battery icon will begin to animate and stop animating once fully charged ( Battery Voltage ≥ 4.18V ).




**6 DESCRIPTION OF WARNING**


**No pass-through:** Vaping is not allowed when the device is charging. The screen will show "No pass-through" if it is power on.

**Low Battery:** The "Low Battery" message means battery voltage below 3.2V before use or lower than 3.0V when you are using, this will continue to display for a few seconds after attempting to fire the device. Users should remove and replace the battery.


**Check Atomizer:** You will be asked to "Check Atomizer" when no atomizer detected, or the atomizer resistance is higher than 3Ω.



**Short Circuit:** When the atomizer resistance is lower than 0.1Ω, the screen displays "Short circuit" once you press the Fire button.



**Too Hot:** The device will shut down and display "TOO HOT" once the temperature of internal board is higher than 80°C. You can use the device again when the temperature is back to 60°C.



**Over 10s:** Output will automatically cut off and screen shows "Over 10s" when you fire over 10s continuously.

