



USER MANUAL



SAFETY WARNING & INSTRUCTIONS

Please read this leaflet carefully before using the product and keep the product in a safe place:

1.Warning For Vulnerable Consumer Groups: The sale and use of e-cigarettes is prohibited for people under the age of 21. The use of e-cigarettes and liquids during pregnancy and breastfeeding, or by a non-smoker is not recommended. Keep this e-cigarette and its components out of the reach of children.

2.Battery Caution: Do not expose the device to extreme temperatures. Do not disassemble the device to service it without Lost Vape's recommendation. This is a high end and powerful device capable of providing a high voltage to the atomizer.

3. Verify The Authenticity: Please verify that the product is an authentic Lost Vape product before purchasing it. Fake and shoddy products may damage your personal health. To verify the product, please refer to <https://lostvape.com/anti-counterfeit/> and follow the steps described in the New Verification System. If you have any questions, please contact us by email, phone or our website to get help.

4.Contacts: For further questions or inquiries, please contact Lost Vape at support@lostvape.com or visit our website: www.lostvape.com.

5.Warranty: The Hyperion DNA 100C mod is covered by a one-year warranty from the date of purchase. Please check our Warranty Guidelines for further information.

MAIN FEATURE

- POWERED BY EVOLV FIRMWARE UPGRADABLE DNA 100C BOARD
- IP68 WATERPROOF AND DUSTPROOF
- SHOCK RESISTANT
- 100W MAX OUTPUT POWER
- 3A TYPE-C FAST CHARGING
- 21700/20700/18650 SINGLE BATTERY COMPATIBLE
- AUTHENTIC LEATHER COVERED

STANDARD PACKAGE



- 1x Hyperion DNA 100C Box Mod
- 1x 18650 Battery Adaptor
- 1x TYPE-C Connecting Cable
- 1x User Manual

BASIC PARAMETERS

Dimension	44.5*34.5*95 mm
Power Range	1-100W
Battery	Single 21700/20700/18650 Battery (Not Included)

Input Voltage	3.0V-4.2V
Output Voltage	0.2V-9.0V
Current Range	0.5A-30A
Temperature Range	200°F-600°F
Coil Resistance supported	0.1Ω-3.0Ω
Coil Material supported	Nickel, Titanium, SS316, KA1, Ni80, Ni90
Screen Pixel	0.9" 80*160
Body Material	Zinc-Alloy & Liquid Silicone Rubber

COMPONENTS OVERVIEW

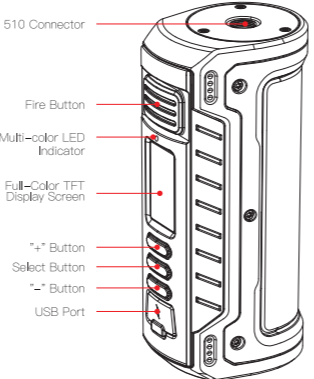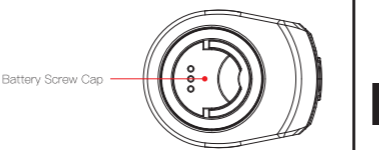


BASIC OPERATION

LOCK/UNLOCK SCREEN

Press the fire button 5 times consistently to lock/unlock the screen. The screen will close off automatically when the device is in standby.




PUFF REPLAY



1. Find your perfect puff
 2. Select save puff
- Then the device will provide the same level of performance and consistency on all subsequent puffs. Disable Replay to resume normal operation or find a new puff to save. If Replay cannot be enabled the coil is not compatible.

WATTS BOOST

The Hyperion DNA 100C supports Boost functionality when not used with a temperature sensing atomizer to briefly increase the initial power output at the start of a puff.



1. Enter Watts Boost Mode: Using the up and down buttons highlight the watts value.
2. Press the select button.
3. Using the up and down buttons adjust the watts to the desired value and press the select button to confirm.


ESCRIBE

Escribe is a software package used to configure, monitor and modify the operation of your DNA 100C. It installs on a Windows or Mac computer and connects to your DNA 100C using the Type-C port. Escribe has a separate manual and tutorials which can be found on Evolv's site.

CHARGING

TEMPERATURE CONTROL

The DNA 100C board directly measures and limits the temperature of the heating coil during operation. By preventing the coil from becoming too hot regardless of fluid, wicking or airflow, a variety of undesirable situations can be prevented.



1. Enter SS/TI/NI Mode: Using the up and down buttons highlight the temperature value.
2. Press the select button.
3. Using the up and down buttons adjust the temperature to the desired value and press the select button to confirm.

ERROR MESSAGES

No Atomizer: The DNA 100C board does not detect an atomizer.

Check Atomizer: The DNA 100C board has detected a large resistance change during operation, the atomizer has shorted out, or the atomizer resistance is incorrect for the power setting.

Check Battery: The battery is deeply discharged and needs to be changed, or is damaged. If this happens, the DNA 100C board will not fire the atomizer. The Check Battery message will continue to display for a few seconds after attempting to fire the device. Users should remove and replace the battery.

Shorted: The atomizer or wiring is short-circuited.

Ohms Too Low: The resistance of the atomizer coil is too low for the current wattage setting. If this happens, the DNA 100C board will continue to fire, but will not be able to provide the desired wattage.

Ohms Too High: The resistance of the atomizer coil is too high for the current wattage setting. If this happens, the DNA 100C board will continue to fire, but will not be able to provide the desired wattage. The Ohms Too High message will continue to display for a few seconds after the end of the puff.

Temperature Protected: The heating coil reached the maximum allowed temperature during the puff. If this happens, the DNA 100C board will

WARRANTY REGISTRATION CARD

Please contact support@lostvape.com for mailing address.

Model Number&Name: _____

Package Serial No.: _____

Print Name: _____

Date of Purchase: _____

Store Name: _____

E-mail: _____

Alleged Defects: _____

Return Address: _____

My signature below acknowledges that I have read, fully understand, and accept this limited warranty agreement.

Signature: _____

Date: _____

Please send this card with copy of dated register receipt, and mail support@lostvape.com with the original package to referred address.

1-Year Warranty from the date of purchase

CONDITIONS NOT COVERED UNDER THE WARRANTY

- * Warranty is expired
- * Normal wear and tear
- * Damage caused by improper operations
- * Products purchased lower than MSRP or from unauthorized vendor.
- * Accidental damage, faults caused by negligent use, lack of maintenance or neglect it

1-Year Warranty from the date of purchase

@lost_vape

@lost_vape

www.lostvape.com